Open Energy for All

Power Conversion System

The HPCS2500-E series is an ANPC PCS launched by Hoymiles, with a maximum efficiency of over 99% and a footprint of only 1.7 m².
Featuring an intelligent liquid-cooling design, the PCS operates without derating even at 51 °C ambient temperature.
With an IP65 protection rating, the PCS adapts to complex outdoor environments, including high altitude, high salt fog, high temperature, and extreme cold.

HPCS2500-E

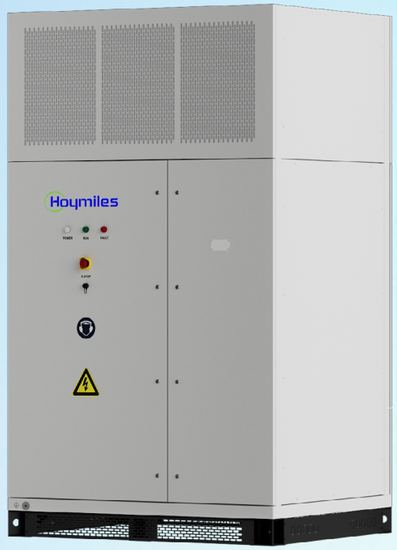

Features

01 ANPC topology, peak efficiency > 99%.

02 Supports constant voltage/current/power modes.

03 Supports functions including primary frequency regulation, rapid voltage adjustment, and VSG.

04 Millisecond-level response enables multiple system protections.

05 Intelligent liquid-cooling design maintaining full power at 51°C ambient temperature.

06 IP65 protection rating, adapts to complex outdoor environments.

Region: Global Version: REV1.5

Technical Specifications

Model	HPCS2500-E
DC Side	
DC Voltage Range	1000 V - 1500 V
Max. Continuous DC-Side Current @40°C	1403 A × 2
Number of inputs	2
AC Side (On-Grid)	
Rated Output Power @51°C	2500 kVA
Max. Continuous Output Power @40°C	2750 kVA
Rated Output Current	2092 A
Max. Output Current	2301 A
Rated AC Voltage	690 V
AC Voltage Range	586.5 V - 759 V
Rated Grid Frequency / Grid Frequency Range	50 Hz / 45 Hz - 55 Hz, 60 Hz / 54 Hz - 66 Hz
DC Injection	< 0.5%In
AC Current Harmonic	< 2% (@Rated Power)
Power Factor	> 0.99 (@Rated Power)
Power Control Precision	≤ 1%Pn (Output Power > 20% * Pn)
Reactive Power Adjustment Range	-105% - 105%
Grid Type	3P3W
Switching Time	
Charge / Discharge Switching Time	< 20 ms (@Rated charging and discharging power)
AC Side (Off-Grid)	
Rated AC Voltage	690 V
AC Voltage Range	586.5 V - 759 V
Output Voltage Precision	< 2%
Rated Grid Frequency / Grid Frequency Range	50 Hz / 45 Hz - 55 Hz, 60 Hz / 54 Hz - 66 Hz
Output Voltage Imbalance	< 2% (< 4% in short time)
AC Voltage Harmonic	< 3% (Linear load)
DC Injection	< 0.5%Un (balanced linear load)
Efficiency	
Peak Efficiency	99%
Protection and Overload	
DC Input	Load switch + Fuses
Reverse Polarity Protection	Integrated
AC Output Protection	Circuit Breaker
Surge Protection	DC Type II / AC Type II
Grid Monitoring and Grounding Fault Monitoring	Integrated
Insulation Monitoring	Integrated
Overheat and Overtemperature Protection	Integrated
Short Circuit Protection	Integrated
DC Overvoltage and Undervoltage Protection	Integrated
AC Line Phase Sequence Error Protection	Integrated
Cooling System Failure Protection	Integrated
Communication Failure Protection	Integrated
Anti-islanding Protection	Integrated, Combination of active and passive
Overload Capacity	Operate for a long time at 1.1 times the rated load. Operate for no less than 2 minutes at 1.2 times the rated load
General Data	
Dimensions (W×H×D)	1450 mm × 2490 mm × 1180 mm
Weight	≈ 2000 kg
Operating Temperature	-40°C to 60°C (> 51°C, Derating operation)
Operating Humidity	0% - 100%RH (Non-condensing)
Altitude	≤ 5000 m (> 3000 m, Derating operation)
IP Rating	IP65, C4 (C5 Optional)
Cooling Method	Intelligent Liquid Cooling
Isolation Method	Transformerless Isolation
Overvoltage Degree	DC port : II, AC port : III
Display and Communication	
Display	Web
Communication Interface	RS485, CAN, Ethernet, DIDO
Communication Protocol	ModbusRTU, ModbusTCP, CAN2.0, IEC61850
Standard and Regulation	
Compliance	IEC/EN 62477, IEC/EN 61000, IEC/EN 50549

* Subject to change without notice.

© 2026 Hoymiles Power Electronics Inc. All rights reserved.